




Recolorezzo **SHINY**  
Decorative Plaster



# Recolorezzo SHINY Decorative Plaster

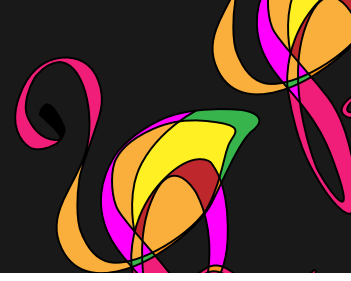

## CHARACTERISTICS

Silk-matt washable interior and exterior water-based paint with a metallic effect. To achieve the effect, apply to a dry and evenly plastered surface. The paint gives the surface a metallic sheen and allows for the creation of various patterns.

## AREAS OF APPLICATION

The plaster can be applied to mineral surfaces such as black coat, concrete, cement board, gypsum plaster, plasterboard, fixed sheet metal and old painted surfaces on both interior and exterior facades.

## SURFACE PREPARATION

Once the intended application surfaces have been cleaned of any dirt, oils, swollen paint and dust, the defects on the inside surface must be corrected with putty.

When applied to a plastered wall, it is advisable to use a deep-penetrating primer and a base-paint in the color. It can be used as a final layer on the SMART plaster.

## APPLICATION INSTRUCTIONS

SHINY must be mixed to a homogeneous state.

After the lower base layer is completely dry, use a roller or a brush to gently apply SHINY to the surface as first layer. Depending on customer's wish, a second layer can be applied, which will make the crystals /plaster structure/ more saturated.

After 5-6 hours at a temperature of 23°C, apply the second layer of paint in the same way. If the desired effect is not achieved, a third layer may be applied. Use different tools to obtain various effects.

During the application, as well as 24 hours after it has ended, the ambient temperature must be at least +5°C and no more than +35°C.

# Recolorezzo SHINY Decorative Plaster



## TECHNICAL PARAMETERS

DENSITY (GR/CM <sup>3</sup> )	1,68 + 0,02
VISCOSITY (KREBS UNITS OF MEASUREMENT)	„Viscos“
FLASH POINT	Water-based
PH	12-14
SOLID SUBSTANCE (% WT)	73 + 2
THEORETICALLY CALCULATED VOLATILE ORGANIC COMPOUNDS (GR/LITER) <small>(EUROPEAN UNION DIRECTIVE N° 2004/42/EC)</small>	40
DILUTION	none
COLOR	According to the Recolorezzo Silk palette
THEORETICAL CONSUMPTION* (GR/M <sup>2</sup> ) (FOR A SINGLE COAT)	15 - 20
COVERING POWER (M <sup>2</sup> /KG)	5 - 6
DRYING TIME (AT 23°C)	Time without touching: 5 hours. Period of complete drying: 24 hours.
SHELF LIFE**	2 years
PACKAGING	1 liter / 2,5 liters

\*Consumption theoretical values: For one coat depending on surface smoothness, absorbency and application techniques.

\*\*Shelf life: According to storage conditions between +5°C and +35°C, in unopened packaging, in a cool and dry place, protected from direct sunlight.

## HAZARD WARNINGS

**H318:** Causes serious eye damage.

## SAFETY MEASURES

**P102:** To be stored in a place that is inaccessible to children.

**P280:** Wear protective gloves, protective clothing, safety glasses and face protection.

**P302+P352:** IN THE EVENT OF SKIN CONTACT: Wash with soap and use plenty of water.

**P332+P313:** IN THE EVENT OF IRRITATED SKIN: Consult a doctor.

**P301+P310:** IN THE EVENT OF SWALLOWING: CONTACT YOUR LOCAL HEALTH CENTER FOR ASSISTANCE or call a doctor.

**P305+P351+P338:** IN THE EVENT OF EYE CONTACT: Rinse gently with water for several minutes.

If you have contact lenses, please remove them and continue rinsing.

Do not use the product packaging for food storage.